



cannondale feel it™ www.cannondale.com/bikes/tech 118860.PDF


REAR DERAILLEUR HANGER
Replacement Kits

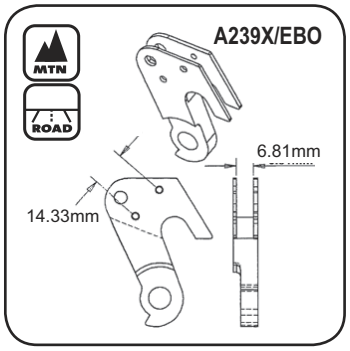

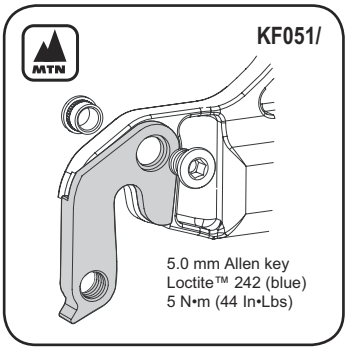


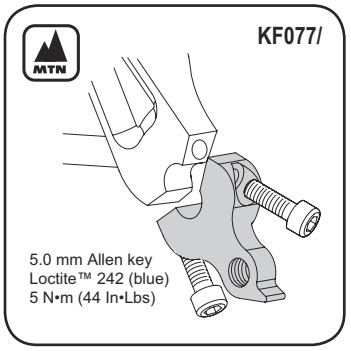


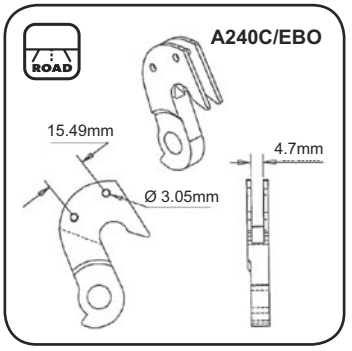


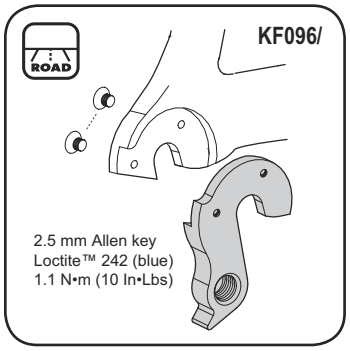





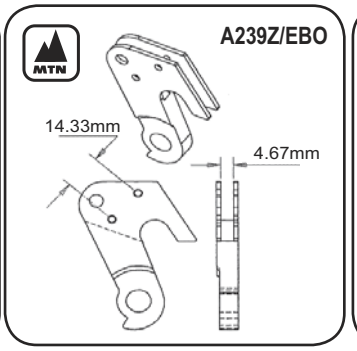

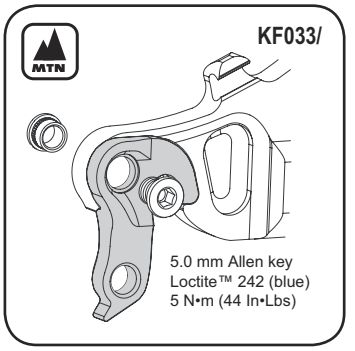

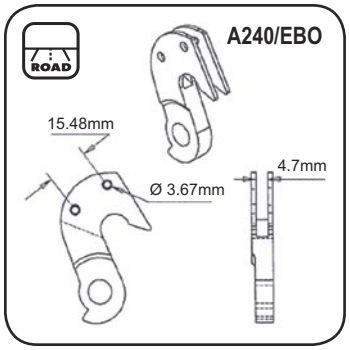

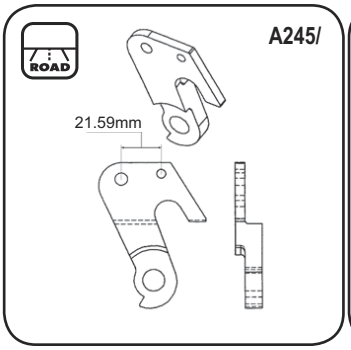

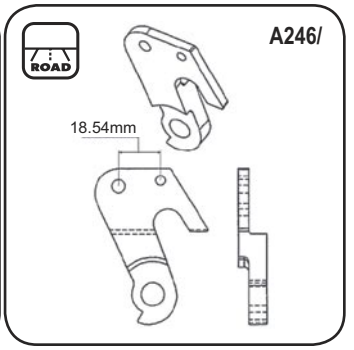

PLEASE NOTE: The hangers listed in right table are older ones and no longer in production. Availability is limited to remaining stock.

ORDER KIT #	BIKES
A239X/EBO	CAAD2, CAAD3, CAAD4, CAAD5, OPTIMO, SUPER-V, RAVEN, JEKYLL to 04, TOURING, HYBRID, DAYTRIPPER
KF051/	GEMINI 05 to present, FURIO, VERSO, OPTIMO MTB, SCALPEL '03 to present , PROPHET, PROPHET SL, JEKYLL 05, CHASE RUSH
KF077/	Any 12 Thru Axle: GEMINI, GEMINI DH, PROPHET 4X, MX, JUDGE
A240C/EBO	CAAD2, CAAD3, CAAD4, CAAD5, CAAD6, CAAD7, SIX 13
KF096/	CAAD8, SIX13 TEAM, SIX 13 PRO, SYNAPSE, IRONMAN SLICE,

ORDER KIT #	BIKES
A239/EBO	MTB TWO BOLT PRE '91 , MTB FRAMES PRE '91
A239Z/EBO	MTB TWO BOLT NON-STANDARD '91 - MTB FRAMES '91 ONLY
KF033/	MTB-SCALPEL 1ST GEN
A240/EBO	ROAD TWO BOLT PRE '91, ROAD FRAMES PRE '91
A245/	RETRO-FIT CAAD1 , CAAD1 AND 4.0 SERIES FRAME
A246/	RETRO-FIT PRE '90, PRE '90 ATB & TOURING

CANNONDALE USA (CUSA)
Cannondale Bicycle Corporation
172 Friendship Road
Bedford, Pennsylvania 15522
(Voice): 1-800-BIKEUSA
(Fax): 814-623-6173
custserv@cannondale.com
URL: http//www.cannondale.com

CANNONDALE AUSTRALIA (CA)
Unit 6, 4 Prosperity Parade
Warriewood N.S.W 2102
Australia
Phone (02)9979 5851
Fax(02)9979 5688
cannondaleaustralia@cannondale.com

CANNONDALE JAPAN (CJ)
12-5 Harayamadai
5-cho Sakai City
Osaka, Japan 590-0132
(Voice): 011.81.722.99.9399
(Fax): 0722-93-6166
cjcustserv@cannondale.com

CANNONDALE EUROPE (CE)
mail: Postbus 5100
visits: Hanzepoort 27
7570 GC Oldenzaal
Netherlands
(Voice): +31 541 573580
(Fax): 31-5415-14240
servicedeskeurope@cannondale.com

All information and specifications are subject to change for product improvement without notice.
© 2005 Cannondale Bicycle Corporation - All Rights Reserved

REVISION 12/05

Replacing a Hanger:

• When installing a replacement, be sure to clean and inspect the dropout for damage. Do not install a replacement hanger onto a damaged dropout.

• Clean surfaces and apply a light film of bike grease to the dropout to minimize noise or "creaking."

• Apply Loctite (when indicated) and tighten the hanger nut/bolt to the specified torque.

• Over-tightening screws may strip hanger threads.

• Not all derailleur hanger kits have the same size/length screws. Be sure to use the screws included with the kit.

• Check to make sure that the hanger screw ends do not contact or interfere with the rear sprocket or chain. File the protruding screw end if necessary.

• Re-attach the rear derailleur to the derailleur hanger and check the inboard and outboard limit adjustment and the index adjustment (where applicable). Be sure to readjust wheel quick release so it is very tight.